60 GHz PTP and P2MP multipoint capabilities

Viesturs Ridins

MikroTik, Latvia

MUM Bulgaria
June 2019

Wireless unlicensed band comparison

2.4 GHz 802.11b/g/n	5 GHz 802.11a/n/ac	60 GHz 802.11ad
 Crowded spectrum Low available channel count 		Oxygen absorptionLow distanceLess channels
 + Higher distances Better penetration through objects 	+High throughputMore available channels	+The highest throughputFree spectrum


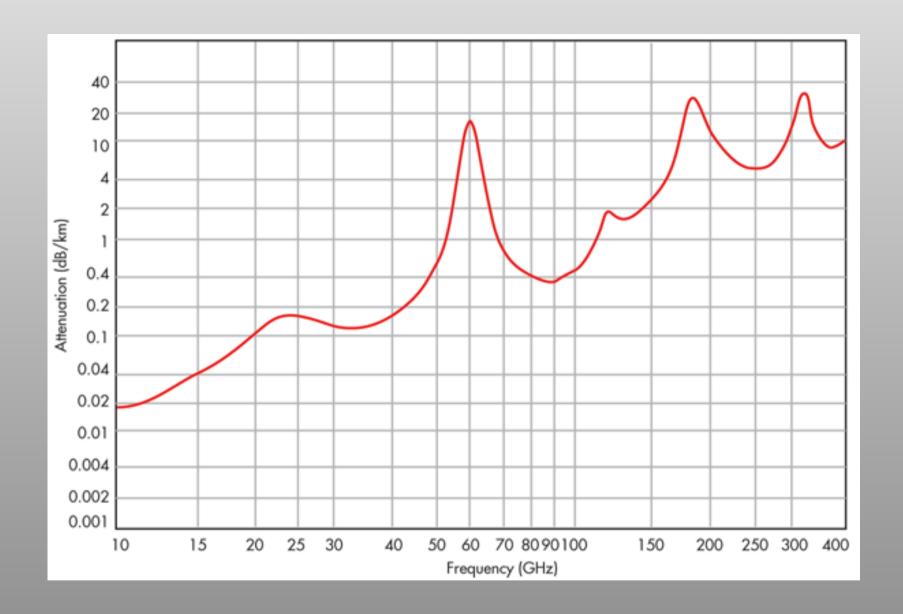


Image Source: http://www.electronicdesign.com

Wireless Wire



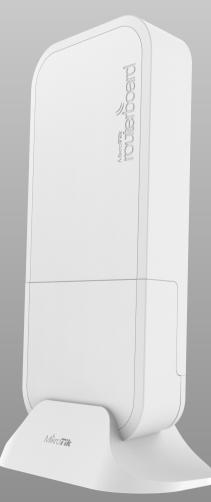

Wireless Wire


- Pre-configured 60 GHz radio link (Plug and Play)
- 4 core CPU running at 716 MHz, 256 MB of RAM
- Only 5 W of maximum power consumption 802.11af/at
- Range of 200 meters or more
- Beamforming and PtMP support

Wireless Wire

- Channel bandwidth 2.16 GHz
- Total EIRP under 40 dBm
- EN 302 567
- 32 antenna elements
- Sweeps between 64 antenna patterns
- Wireless coverage close to 180 degrees
- Price \$198 for kit of two devices


wAP 60G and wAP 60G AP

- Same hardware as used in Wireless Wire kit
- Total EIRP under 40 dBm
- EN 302 567
- License level 3
- Price \$99 (Level3)129\$ (Level4)

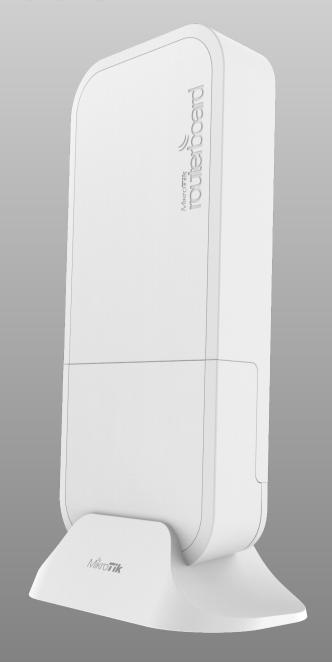

wAP 60Gx3 AP

- Multiple antenna elements provide wider field or view
- Access Point device for 8 clients
- 180 degree field of view
- Price \$199 (Level4)

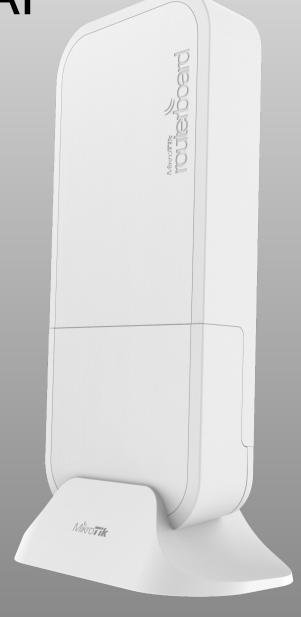

SXTsq Lite60

- For distances 200m+
- Slim design
- EN 305 550 and EN 302 567
- License level 3
- Fast Ethernet
- Price \$69



LHG 60G kit

- For distances up to
 1500 m+
- Antenna gain 42 dBi
- Total EIRP under 55dBm
- EN 302 217 Fixed Point to Point compliant
- License level 3
- Price \$298 for kit



LHG Lite60


- Low cost unit
- Fast Ethernet
- Works in the same distances as LHG60G(1500m+)
- Designed as long range CPE in PtMP setups
- Price \$99



Wireless modes

- Wireless modes for 60 GHz
 - "ap-bridge"
 - "bridge"
 - "station-bridge" (WDS equivalent)
 - "sniff"
- Configuration under "/interface w60g" menu
 - SSID
 - Password
 - Mode

Performance in 1500 meter link

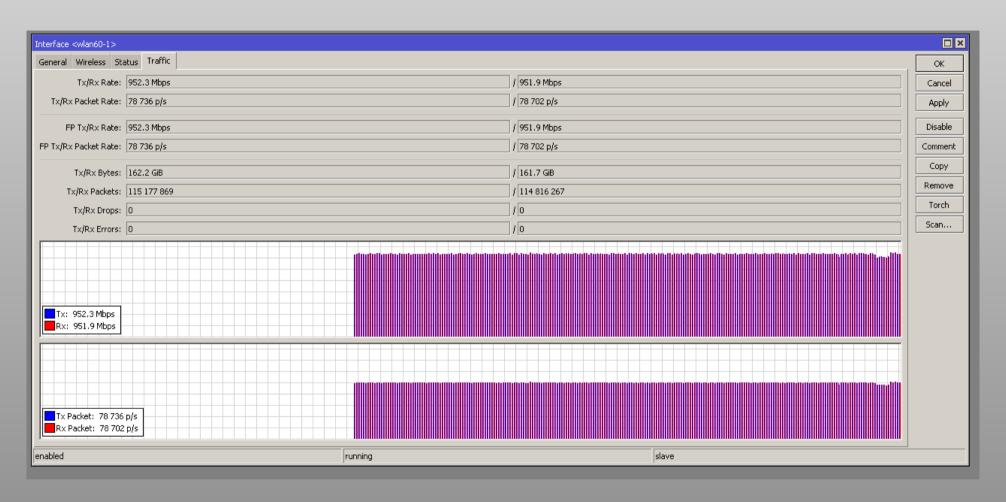

Winbox traffic graph showing "Wireless Wire Dish" speed on 1500 m link


Performance comparison to wired network

Throughput (<0,1% loss)	Theoreti	cal max	16 Str	eams both	ways	4096 S	treams bot	n ways
Frame size (bytes)	kpps	Mbps	kpps	Mbps	%	kpps	Mbps	%
64	2976,1	1 523,8	2022	1 035,3	67,94	1977	1 012,2	66,43
128	1689,2	1 729,7	1496,2	1 532,1	88,57	1612	1 650,7	95,43
192	1179,2	1 811,3	1173	1 801,7	99,47	1173	1 801,7	99,47
256	905,8	1 855,1	905,8	1 855,1	100,00	905,8	1 855,1	100,00
384	618,8	1 901,0	618,8	1 901,0	100,00	618,8	1 901,0	100,00
512	469,9	1 924,7	469,9	1 924,7	100,00	469,9	1 924,7	100,00
768	317,2	1 948,9	317,2	1 948,9	100,00	317,2	1 948,9	100,00
1024	239,4	1 961,2	239,4	1 961,2	100,00	239,4	1 961,2	100,00
1280	192,3	1 969,2	192,3	1 969,2	100,00	192,3	1 969,2	100,00
1518	162,5	1 973,4	162,5	1 973,4	100,00	162,5	1 973,4	100,00
TCP connection	181,6	1 970,6	181,6	1 970,6	100,00	181,6	1 970,6	100,00

All UDP tests are done with Xena Networks specialized test equipment (XenaBay), and done according to RFC2544 (Xena2544) with 0,1% acceptable loss TCP tests done by using iperf3:

https://iperf.fr/

Performance comparison to wired network

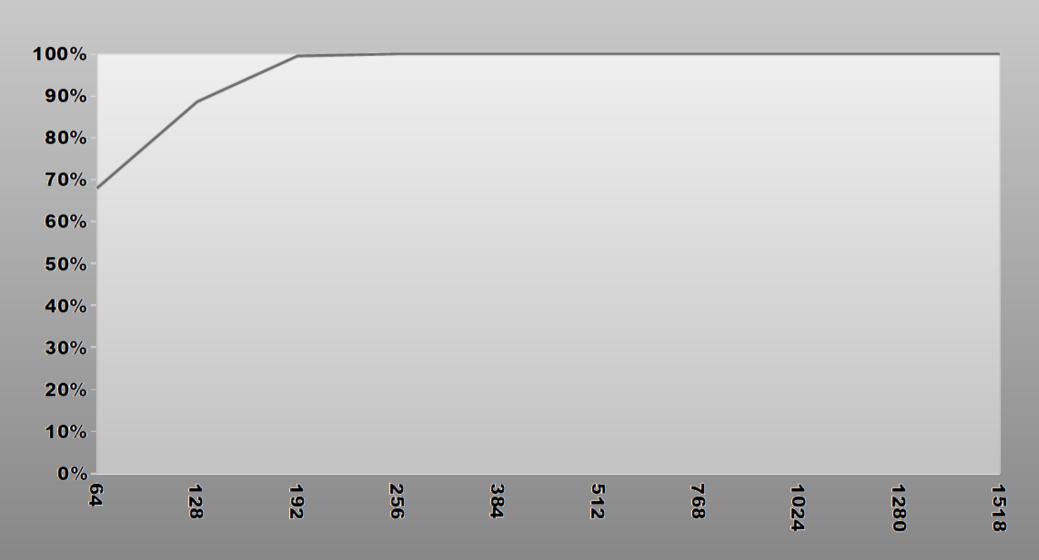

Point to Multi Point support

- Experimental support already available starting from 6.41
- Requires level 4 license for AP device
- Connected clients are treated as individual interfaces - easy to configure and manage
- Supports 8 simultaneously connected clients

wAP60G, SXTsq 60 and LHG60G

- All devices are mutually compatible
- wAP60G makes excellent Access Point for PTMP usage case together with LHG 60G client devices
- Easy to deploy, easy to configure and monitor
- Fastest PTMP solution at this price range

wAP 60G or wAP60G x3 and LHG60G

Distance Meters*	RSSI wAP60G	RSSI LHG60G	Total Throughput
300	-63	-68	1.8Gbps
500	-63	-68	1.8Gbps
600	-65	-69	1.8Gbps
700	-66	-69	1.5Gbps
800	-66	-69	1.2Gbps
850	-68	-69	800Mbps
900	-70	-72	100Mbps


^{*}Tests done before latest software changes increasing distance

- Re-calibrated antenna sectors increasing distance over 200m for wAP60G (RouterOS update required) and increasing Wireless Wire dish maximum distance
- Added RSSI for monitoring signal strength
- Added distance measurement tool
- Updated Beamforming pattern information for easier LHG60G alignment

- More improvements in Beamforming efficiency
- Throughput improvements when link fully utilized
- Improved P2MP throughput performance
- Added 4th channel (Center frequency 64800MHz) and 66000MHz frequency(CLI only), supports distances up to 4Km
- Added new align feature in the RouterOS

Added new align feature in the RouterOS

LEDs help to find best Beamforming pattern

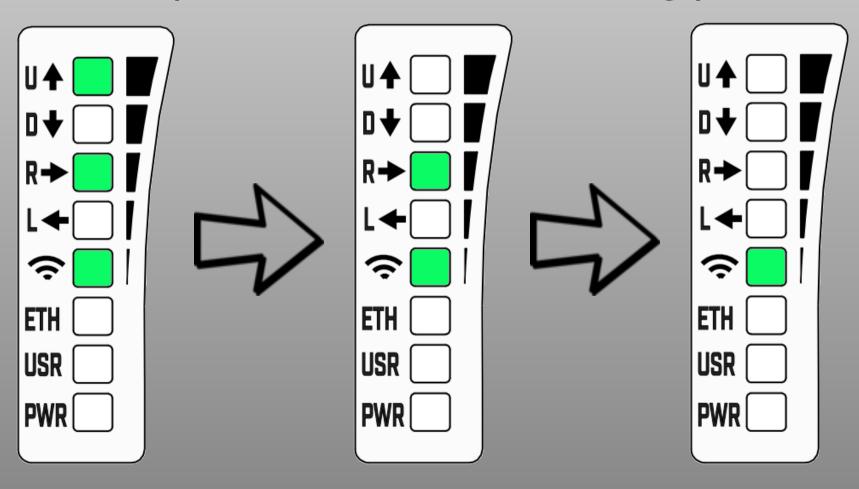


Testing software

- Bandwidth test
 - Works under RouterOS, PC (Windows, Mac, Linux)
- Traffic Generator
 - Works under RouterOS
- Iperf and iperf3
 - Works on PC (Windows, Mac, Linux)
- Speedtest.net
- Other tools

Live demo

Test setup:

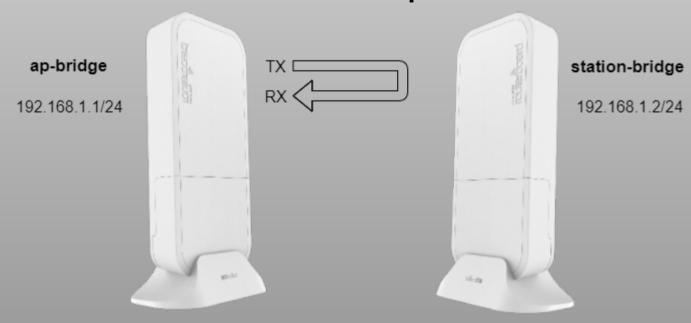

/tool traffic-generator packet-template
add ip-dst=192.168.1.1 ip-gateway=192.168.1.2 ip-src=192.168.1.10 name=test1 udp-dst-port=100-300
/tool traffic-generator stream
add mbps=900 name=streaml packet-size=1500 tx-template=test1

Live demo

To start Traffic Generator run:

/tool traffic-generator start

To stop:

/tool traffic-generator stop

 To run temporary Traffic Generator with extra arguments:

/tool traffic-generator quick mbps=300 packet-size=256 duration=100

Thank you for your attention!