

# Load Balancing and Fail-Over in Router Os

Presented By

Ambrose Ahurra  
Simplifinetworks Ltd.



# About Simplifinetworks

- Largest Mikrotik Routerboard Distributor in E/A.
- WiFi AP, PTP, PTMP, Security

 **Address : 13 C/A Luthuli Drive Bugolobi**  
• **P.O Box : 25306, Kampala Uganda.**  
• **Mobile : +256 (0) 758 937 003**

 **Address: Hillcrest Court, Hillcrest Drive, Karen**  
• **P.O Box: 15097-00509, Nairobi Kenya**  
• **Mobile: +254 (0) 727 401 262 /+254 (0) 737 296 186**




# About Presenter

- Router Os user since 2015
- Big fan of API..(php)
- First MUM :)
- Affiliation
  - Simplifinetworks
  - netLabsUG Research project @ Makerere University Kampala



# Agenda


- Load Balancing

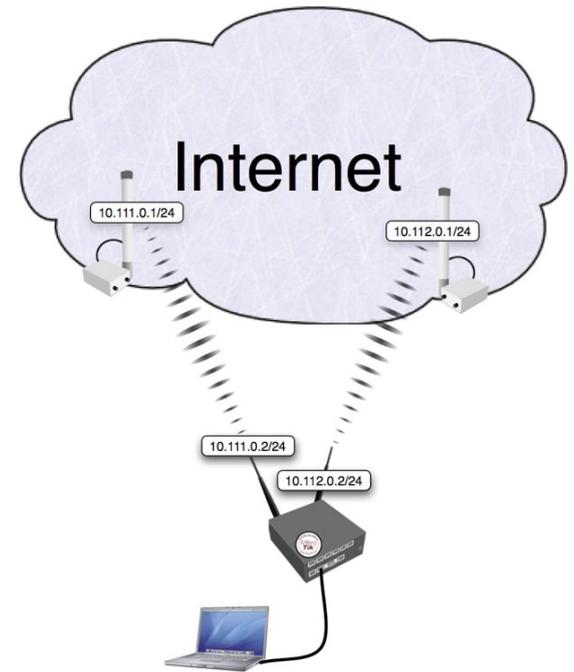

- SimplifiApp



# Load Balancing...

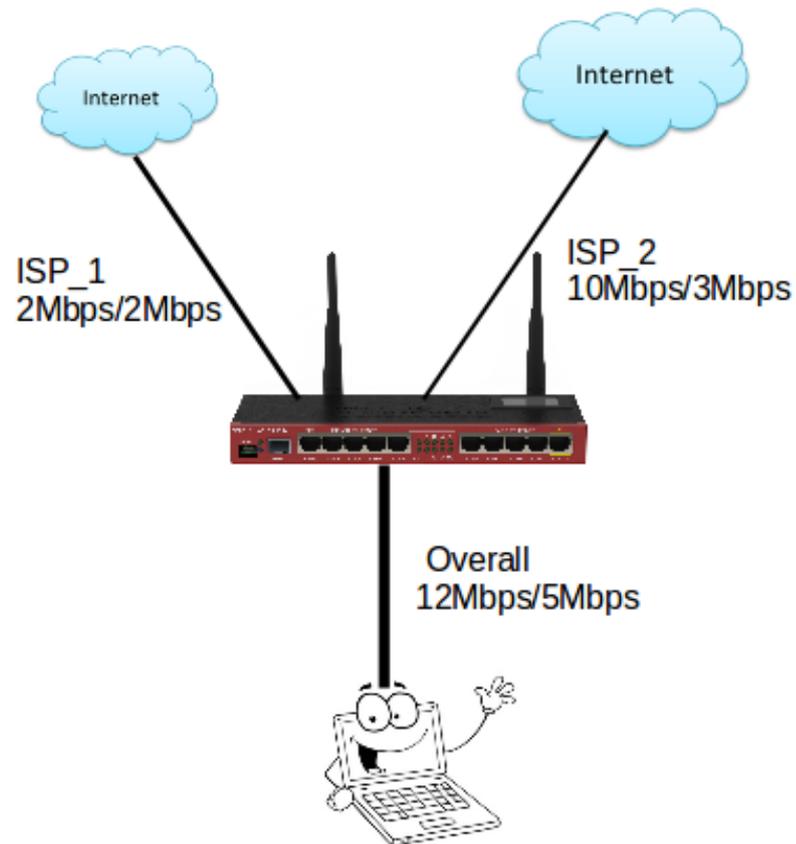

- Hotspot provider
- Hotel /Office/Hostel/Hostel
- Apartments

# Why

- Average speeds 2mb/2mb..slow.
- Always on requirement
- High Throughput need
- Cost considerations



# Router OS options

- ECMP → Equal Cost Multi path Routing

Traffic divided up per src-dst-address combination.

Chances of traffic switching gateways when routing tables are periodically flushed.

- Nth Load Balancing

Ties user to same source IP address (persistent user sessions)

# Router OS options

- PCC → Per Connection Classifier

Splits traffic into streams according to a set of options (src-address, src-port, dst-address, dst-port) using a hashing algorithm.


For example:

**PCC= Hash(dst-address-and-port)/Denominator-> Reminder**

- Remainder=> 0-4294967295 (integer number)
- Denominator=> 1-4294967295 (integer number)
- ValuesToHash ::= both-addresses|both-ports|dst-address-and-port|src-address|src-port|both-addresses-and-ports|dst-address|dst-port|src-address-and-port

If reminder equals X label connection 1/stream1

# Router Os Options

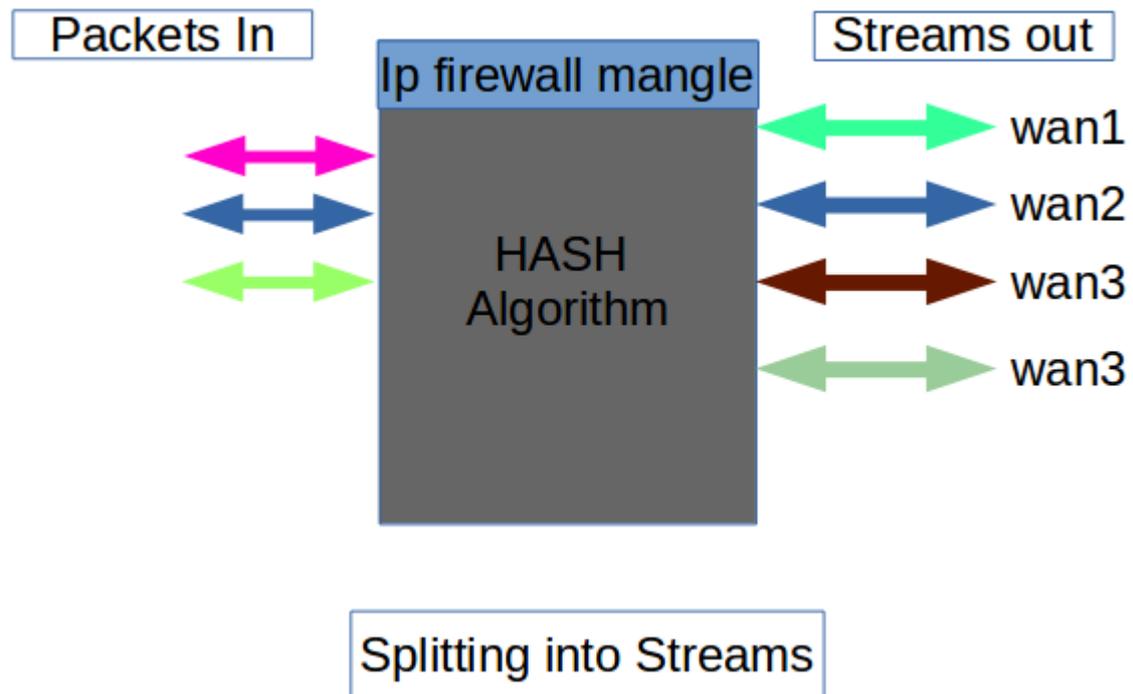


# What you need!!

- Mikrotik Routerboard -> RouterOs v3.48 & above.
- 2 or more Internet connections.
  - Wan1 192.168.30.2
  - Wan2 192.168.42.2
  - Lan 192.168.88.0/24



# Set Up

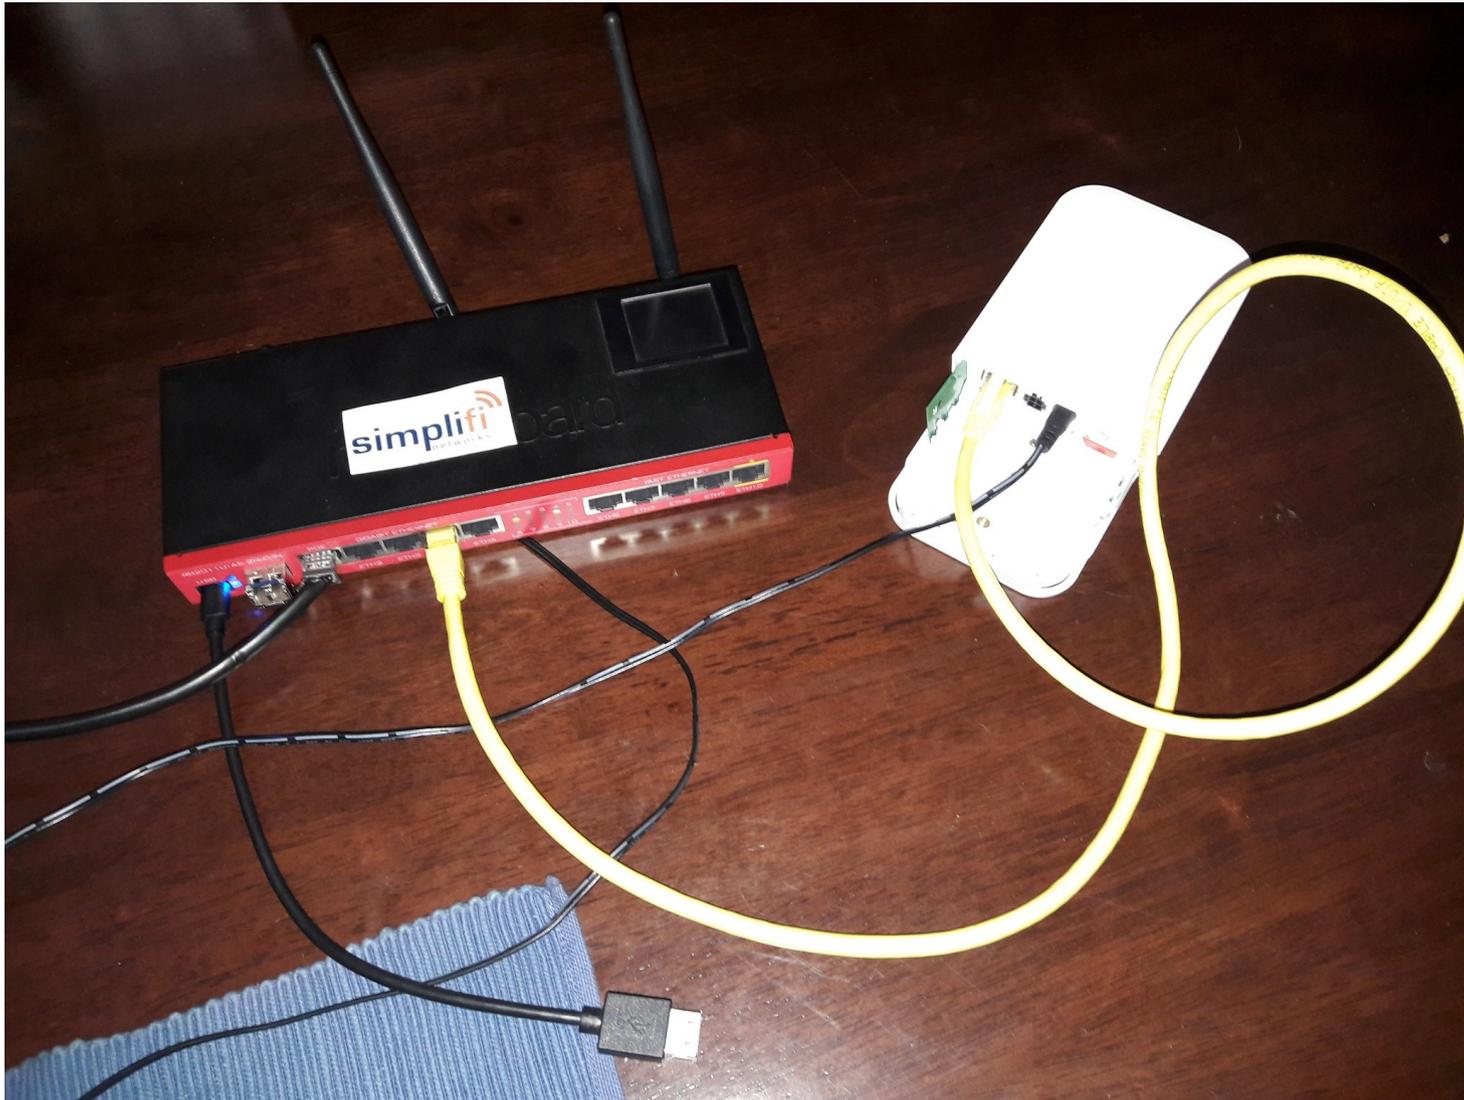

# Set Up

- Add addresses
- Accept traffic in the prerouting chain

1

Address	Network	Interface
192.168.30.2/24	192.168.30.0	Wan1
192.168.42.1/24	192.168.42.0	Wan2
;;; defconf		
192.168.88.1/24	192.168.88.0	bridge

2

#	Action	Chain	Src. Ad...	Dst. Address	Prot...	Src. Port	Dst. Port	In. Int...	Out. I...	Bytes	Packets
;;; special dummy rule to show fasttrack counters											
0	D passthrough	prerouting								118.8 MiE	136 326
;;; special dummy rule to show fasttrack counters											
1	D passthrough	forward								118.8 MiE	136 326
;;; special dummy rule to show fasttrack counters											
2	D passthrough	postrouting								118.8 MiE	136 326
3	✓ accept	prerouting		192.168.42.0/24				bridge		0 B	0
4	✓ accept	prerouting		192.168.30.0/24				bridge		0 B	0

/ ip address

add address=192.168.88.1/24 network=192.168.88.0 interface=bridge

add address= 192.168.30.2/24 network=192.168.30.0 interface=Wan1

add address=192.168.42.2/24 network=192.168.42.0 interface=Wan2



/ip firewall mangle

add action=accept chain=prerouting dst-address=192.168.42.0/24 in-interface=bridge

add action=accept chain=prerouting dst-address=192.168.30.0/24 in-interface=bridge

# Set Up

- Mark traffic from the Internet to avoid replies using wrong gateway.

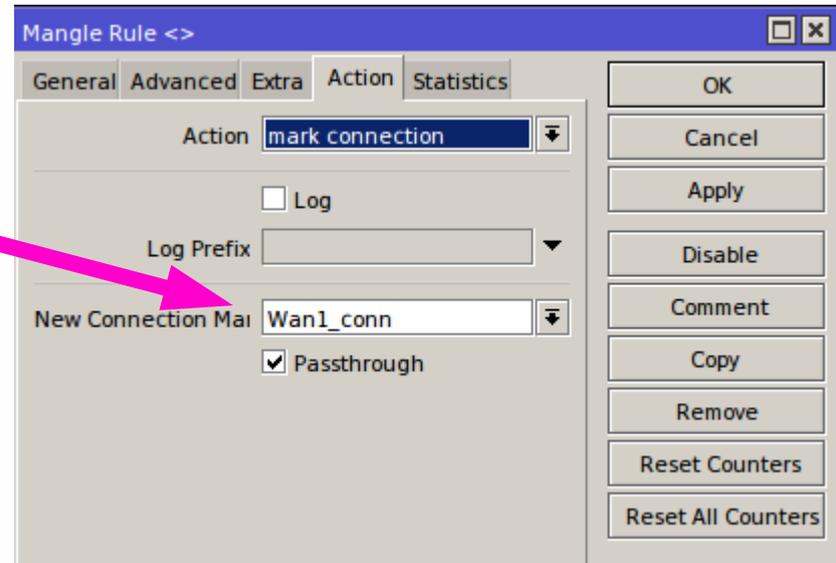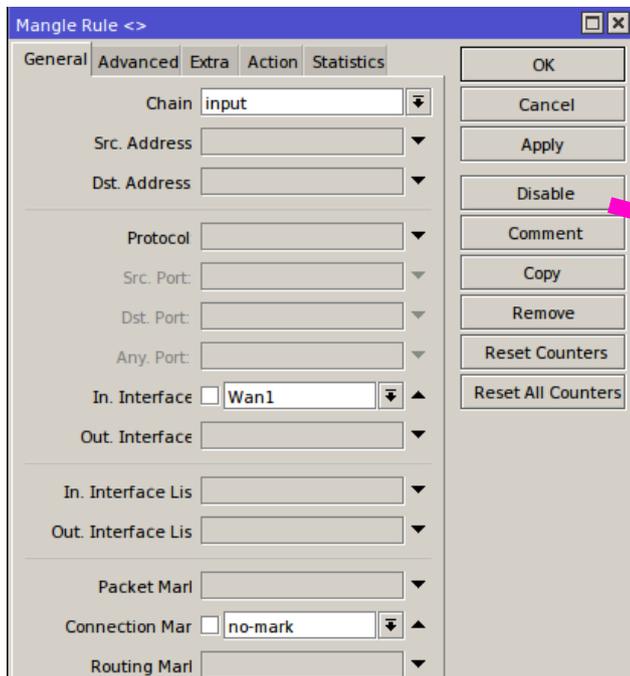

```
/ip firewall mangle
```

```
add action=mark-connection chain=input connection-mark=no-mark in-interface=Wan1 new-connection-mark=Wan1_conn passthrough=yes
```

```
add action=mark-connection chain=input connection-mark=no-mark in-interface=Wan2 new-connection-mark=Wan2_conn passthrough=yes
```

# Set Up

- Add the PCC rules in Ip mangle menu and mark connections

The image displays three screenshots of the Mikrotik WinBox Mangle Rule configuration interface, illustrating the steps to set up a PCC rule.

**Top-Left Screenshot (General Tab):** Shows the Chain set to `prerouting` and the In. Interface set to `bridge`.

**Top-Right Screenshot (Advanced Tab):** Shows the Per Connection Classification set to `both addresses and port` with a rate of `2 / 0`.

**Bottom Screenshot (Action Tab):** Shows the Action set to `mark connection`, the Log checkbox checked, and the New Connection Mark set to `Wan1_conn`.

# Set Up

```
/ip firewall mangle
```

```
add action=mark-connection chain=prerouting connection-mark=no-mark dst-address-type=!local in-interface=bridge new-connection-mark=Wan1_conn passthrough=yes per-connection-classifier=both-addresses-and-ports:2/0
```

```
add action=mark-connection chain=prerouting connection-mark=no-mark dst-address-type=!local in-interface=bridge new-connection-mark=Wan2_conn passthrough=yes per-connection-classifier=both-addresses-and-ports:2/1
```

- **Add routing mark in prerouting and output chains**

```
/ip firewall mangle
```

```
add action=mark-routing chain=prerouting connection-mark=Wan1_conn in-interface=bridge new-routing-mark=to_Wan1 passthrough=no
```

```
add action=mark-routing chain=prerouting connection-mark=Wan2_conn in-interface=bridge new-routing-mark=to_Wan2 passthrough=no
```

```
add action=mark-routing chain=output connection-mark=Wan1_conn new-routing-mark=to_Wan1
```

```
add action=mark-routing chain=output connection-mark=Wan2_conn new-routing-mark=to_Wan2
```

# Set Up

Firewall												
Filter Rules NAT Mangle Raw Service Ports Connections Address Lists Layer7 Protocols												
<input type="button" value="00 Reset Counters"/> <input type="button" value="00 Reset All Counters"/> <span style="float: right;"><input type="text" value="Find"/></span>												
#	Action	Chain	Src. Ad...	Dst. Address	Prot...	Src. Port	Dst. Port	In. Int...	Out. I...	Bytes	Packets	
;;; special dummy rule to show fasttrack counters												
0	D  passthrough	prerouting								118.8 MiE	136 433	
;;; special dummy rule to show fasttrack counters												
1	D  passthrough	forward								118.8 MiE	136 433	
;;; special dummy rule to show fasttrack counters												
2	D  passthrough	postrouting								118.8 MiE	136 433	
3	accept	prerouting		192.168.42.0/24				bridge		0 B	0	
4	accept	prerouting		192.168.30.0/24				bridge		0 B	0	
5	mark connection	input						Wan1		20.7 KiB	254	
6	mark connection	input						Wan2		73.5 KiE	561	
7	mark connection	prerouting						bridge		21.0 KiB	339	
8	mark connection	prerouting						bridge		33.3 KiE	436	
9	mark routing	prerouting						bridge		436.7 KiB	3 147	
10	mark routing	prerouting						bridge		473.1 KiB	7 536	
11	mark routing	output								549 B	6	
12	mark routing	output								2699 B	39	


# Masquerade Rule

- Add a masquerade rule for each Wan connection in *ip firewall nat*;

```
/ip firewall nat
```

```
add action=masquerade chain=srcnat out-interface=Wan1
```

```
add action=masquerade chain=srcnat out-interface=Wan2
```

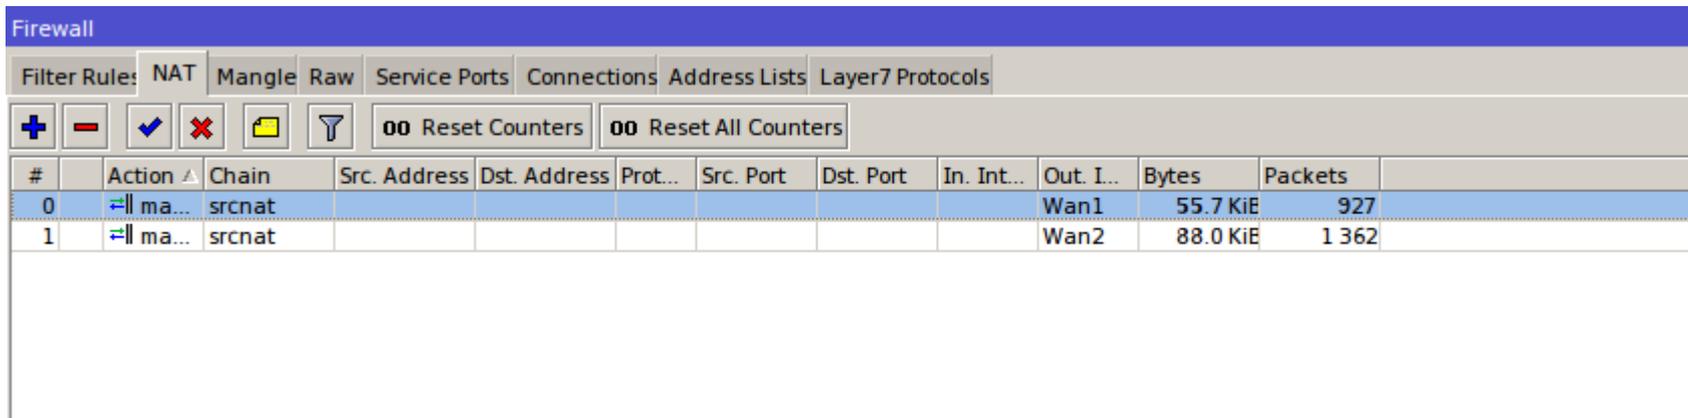

The screenshot shows the Mikrotik WinBox Firewall configuration interface. The 'NAT' tab is selected, and two masquerade rules are listed in the table below. The table has columns for rule number, action, chain, source and destination addresses, ports, and interfaces. Rule 0 is active and uses the 'srcnat' chain, with 55.7 KiB of traffic and 927 packets on the 'Wan1' interface. Rule 1 is also active and uses the 'srcnat' chain, with 88.0 KiB of traffic and 1,362 packets on the 'Wan2' interface.

#	Action	Chain	Src. Address	Dst. Address	Prot...	Src. Port	Dst. Port	In. Int...	Out. I...	Bytes	Packets
0	masquerade	srcnat							Wan1	55.7 KiB	927
1	masquerade	srcnat							Wan2	88.0 KiB	1 362

# Set Up

- Routing Table

Route List

Routes Nexthops Rules VRF

+ - ✓ ✗ 📄 🔍 Find



	Dst. Address ▲	Gateway	Check Gateway	Distance	Routing Mark	Pref. Source	
AS	▶ 0.0.0.0/0	192.168.42.1 reachable Wan2	ping	1	to_Wan2		
AS	▶ 0.0.0.0/0	192.168.30.1 reachable Wan1	ping	1	to_Wan1		
S	▶ 0.0.0.0/0	192.168.30.1 reachable Wan1		1			
AS	▶ 0.0.0.0/0	192.168.42.1 reachable Wan2		1			
DAC	▶ 192.168.30.0/...	Wan1 reachable		0		192.168.30.2	
DAC	▶ 192.168.42.0/...	Wan2 reachable		0		192.168.42.1...	
DAC	▶ 192.168.88.0/...	bridge reachable		0		192.168.88.1	

# Set Up

Firewall									
Filter Rules NAT Mangle Raw Service Ports Connections Address Lists Layer7 Protocols									
Tracking <span style="float: right;">Find</span>									
	Src. Address	Dst. Address	Proto...	Connection Mark	Timeout	TCP State	Orig./Repl. Rate	Orig./Repl. Bytes	
SC	192.168.42.127	192.168.42.1	1 (ic...	Wan2_conn	00:00:00		0 bps/0 bps	56 B/56 B	
C	192.168.88.253:5678	255.255.255.255:5678	17 (u...	Wan2_conn	00:00:00		0 bps/0 bps	122 B/0 B	
SC	192.168.42.127:355...	8.8.8.8:53	17 (u...	Wan2_conn	00:00:04		0 bps/0 bps	80 B/239 B	
SC	192.168.30.2	192.168.30.1	1 (ic...	Wan1_conn	00:00:09		0 bps/0 bps	56 B/56 B	
SACFs	192.168.88.253:123	196.10.55.57:123	17 (u...	Wan1_conn	00:01:15		0 bps/0 bps	760 B/760 B	
SACFs	192.168.88.253:123	197.82.150.123:123	17 (u...	Wan1_conn	00:01:46		0 bps/0 bps	532 B/532 B	
SACFs	192.168.88.253:123	168.167.71.140:123	17 (u...	Wan2_conn	00:02:30		0 bps/0 bps	912 B/532 B	
SACFs	192.168.88.253:123	196.10.52.57:123	17 (u...	Wan2_conn	00:02:44		0 bps/0 bps	684 B/304 B	
SACFs	192.168.88.253:123	41.231.53.4:123	17 (u...	Wan2_conn	00:02:44		0 bps/0 bps	684 B/304 B	
SACFs	192.168.88.253:123	196.21.206.2:123	17 (u...	Wan1_conn	00:02:54		0 bps/0 bps	608 B/608 B	
SAC	192.168.88.253:33...	192.168.88.1:53	17 (u...		00:02:54		0 bps/0 bps	14.5 KiB/30.6 KiB	
SACFs	192.168.88.253:123	165.73.240.117:123	17 (u...	Wan1_conn	00:02:54		0 bps/0 bps	608 B/608 B	
SACFs	192.168.88.253:123	41.79.80.34:123	17 (u...	Wan2_conn	00:02:55		0 bps/0 bps	608 B/228 B	
SACFs	192.168.88.253:33...	8.8.8.8:53	17 (u...	Wan2_conn	00:02:58		4.8 kbps/9.9 kbps	54.3 KiB/126.6 KiB	
SACFs	192.168.88.253:36...	197.239.33.18:8080	6 (tcp)	Wan1_conn	00:04:55	establishe	0 bps/0 bps	9.6 KiB/189.5 KiB	
SACFs	192.168.88.253:32...	216.58.223.78:443	6 (tcp)	Wan2_conn	23:59:17	establishe	0 bps/0 bps	6.5 KiB/9.9 KiB	
SACFs	192.168.88.253:49...	64.233.184.155:443	6 (tcp)	Wan2_conn	23:59:17	establishe	0 bps/0 bps	1990 B/1372 B	
SACFs	192.168.88.253:35...	216.58.223.98:443	6 (tcp)	Wan1_conn	23:59:20	establishe	0 bps/0 bps	47.1 KiB/148.2 KiB	
SACFs	192.168.88.253:36...	197.239.33.18:8080	6 (tcp)	Wan2_conn	23:59:36	establishe	0 bps/0 bps	197.3 KiB/8.7 MiB	
SACFs	192.168.88.253:36...	197.239.33.18:8080	6 (tcp)	Wan2_conn	23:59:36	establishe	0 bps/0 bps	171.6 KiB/6.9 MiB	
SACFs	192.168.88.253:36...	197.239.33.18:8080	6 (tcp)	Wan2_conn	23:59:36	establishe	0 bps/0 bps	130.3 KiB/6.2 MiB	
SACFs	192.168.88.253:58...	66.102.1.189:443	6 (tcp)	Wan1_conn	23:59:41	establishe	0 bps/0 bps	6.8 KiB/6.4 KiB	
SACFs	192.168.88.253:52...	216.58.223.66:443	6 (tcp)	Wan2_conn	23:59:55	establishe	0 bps/0 bps	9.6 KiB/8.8 KiB	
SACFs	192.168.88.253:446...	216.58.223.69:443	6 (tcp)	Wan2_conn	23:59:55	establishe	0 bps/0 bps	13.2 KiB/79.3 KiB	
SACFs	192.168.88.253:411...	178.255.156.105:5938	6 (tcp)	Wan2_conn	23:59:49	establishe	0 bps/0 bps	1468 B/988 B	
SACFs	192.168.88.253:492...	216.58.223.66:80	6 (tcp)	Wan1_conn	23:59:50	establishe	0 bps/0 bps	3684 B/2590 B	
SACFs	192.168.88.253:492...	216.58.223.66:80	6 (tcp)	Wan1_conn	23:59:50	establishe	0 bps/0 bps	3684 B/2590 B	
SACFs	192.168.88.253:492...	216.58.223.66:80	6 (tcp)	Wan1_conn	23:59:50	establishe	0 bps/0 bps	3680 B/2590 B	
SACFs	192.168.88.253:402...	52.211.81.239:80	6 (tcp)	Wan1_conn	23:59:50	establishe	0 bps/0 bps	2031 B/1539 B	
SACFs	192.168.88.253:59...	216.58.223.67:443	6 (tcp)	Wan2_conn	23:59:52	establishe	0 bps/0 bps	1521 B/883 B	
SACFs	192.168.88.253:58	216.58.223.78:80	6 (tcp)	Wan1_conn	23:59:52	establishe	0 bps/0 bps	2648 B/3446 B	

# Set Up

- Traffic

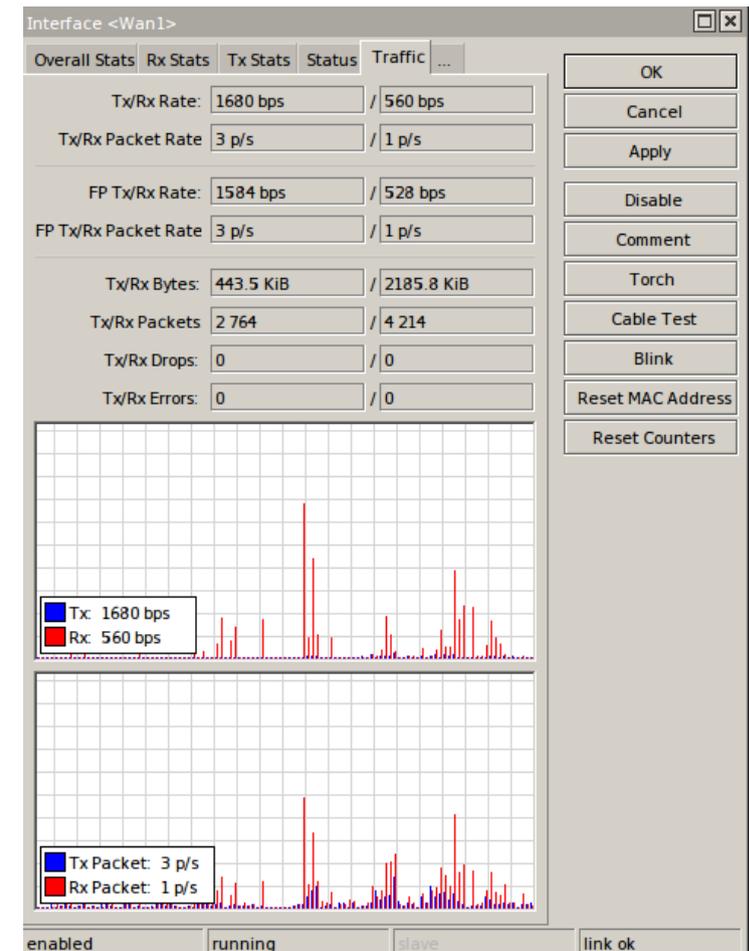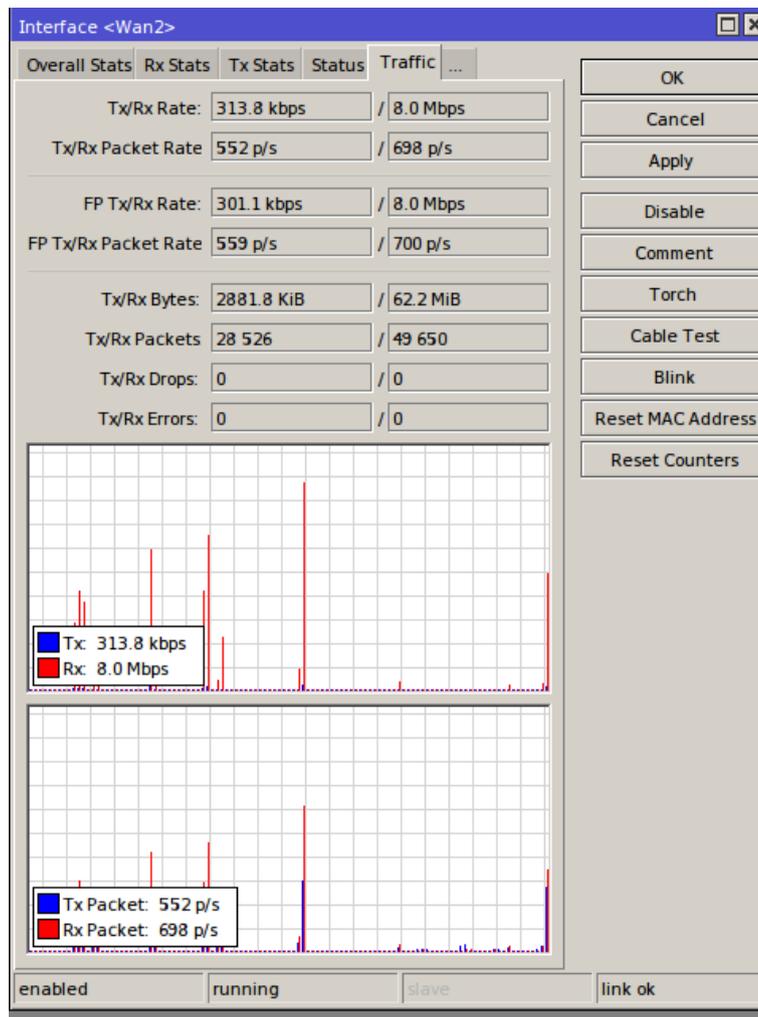

# Speed Test

## Speed Results

DOWNLOAD SPEED 

11.12 Mbps

UPLOAD SPEED 

5.34 Mbps



Latency  
301 ms



Protocol  
IPv4



Host  
Foxboro, MA

[Learn about the things that may affect your test results.](#)

Test Again

Speed Survey

# Considerations

## PCC with Hotspot

- See: [https://wiki.mikrotik.com/wiki/Manual:Hotspot\\_with\\_PCC](https://wiki.mikrotik.com/wiki/Manual:Hotspot_with_PCC)

### Third WAN connection

- Just modify PCC rule and corresponding routing mark and default route

```
/ip firewall mangle
```

```
add action=mark-connection chain=prerouting connection-mark=no-mark dst-address-type=!local in-interface=bridge new-connection-mark=Wan1_conn passthrough=yes per-connection-classifier=both-addresses-and-ports:3/0
```

```
add action=mark-connection chain=prerouting connection-mark=no-mark dst-address-type=!local in-interface=bridge new-connection-mark=Wan2_conn passthrough=yes per-connection-classifier=both-addresses-and-ports:3/1
```

```
add action=mark-connection chain=prerouting connection-mark=no-mark dst-address-type=!local in-interface=bridge new-connection-mark=Wan3_conn passthrough=yes per-connection-classifier=both-addresses-and-ports:3/2
```

# Resources

- <https://wiki.mikrotik.com/wiki/Manual:PCC>
- [https://wiki.mikrotik.com/wiki/ECMP\\_load\\_balancing\\_with\\_masquerade](https://wiki.mikrotik.com/wiki/ECMP_load_balancing_with_masquerade)
- <https://mum.mikrotik.com/presentations/US12/steve.pdf>

